

O1 CONCRETE PATH DETAIL O5 SCALE 1:20

DOWELS Y16 x 500 Long @ 450 CENTRES MAX, PLACED CENTRALLY IN SLAB. ONE HALF OF DOWEL TO BE GREASED PRIOR TO POURING CONCRETE & FITTED WITH DOWEL CAP WITH EXPANSION SPACE.

FULL DEPTH 'CONNOLLY EXPANSION JOINTS'

(EXJ150) WITH 'CONNOLLY PERMANENT PVC
CAPPING' OR EQUIVALENT JOINT (TO BE
APPROVED BY SUPERINTENDENT) AT 15
METRE SPACINGS.

DOWEL CAP

DOWEL CAP

SEE SEE

250

BOND BREAKING MATERIAL.

TYPICAL DOWELLED EXPANSION JOINT @ 15m CENTRES (MAX)

SCALE 1:20

DOWEL BAR


20
PVC CAP FILLED WITH
DEFORMABLE
POLYURETHANE OR
SIMILAR MATERIAL
BOND BREAKING MATERIAL

1. EXPANSION JOINTS AT 15m CENTRES (MAX.)

2. SAWCUTTING AT 3m CENTRES 3. BROOM FINISH ACROSS PATH


4. PATH COLOUR GREY

03 DOWELL CAP DETAIL
05 SCALE 1:10



TYPICAL SAWN CONTRACTION JOINT DETAIL @ 3m CENTRES (MAX.)

SCALE 1:20

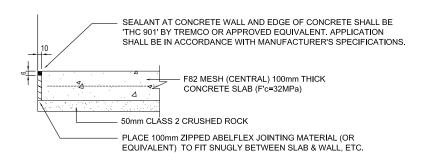

TYPICAL ISOLATION JOINT DETAIL

SCALE 1:20

Yarra Standard: YSD409

Drawing Title:
Paving (Open Space)

Concrete Shared Path

| REV | DATE | DRAWN BY | A | 06/09/02 | B | 30/04/12 | DKC | C | 18/12/12 | DKC | D | 23/02/16 | KA |

